




linebox40
5154 960_961



5154 960 319B	3x10,3W.	3x1.405	136,4lm/W.	spot	3.000
5154 960 325B	3x10,3W.	3x1.405	136,4lm/W.	medium	3.000
5154 960 337B	3x10,3W.	3x1.405	136,4lm/W.	flood	3.000
5154 960 419B	3x10,3W.	3x1.486	144,3lm/W.	spot	4.000
5154 960 425B	3x10,3W.	3x1.486	144,3lm/W.	medium	4.000
5154 960 437B	3x10,3W.	3x1.486	144,3lm/W.	flood	4.000
5154 961 319B	3x16,8W.	3x2.422	144,2lm/W.	spot	3.000
5154 961 325B	3x16,8W.	3x2.422	144,2lm/W.	medium	3.000
5154 961 337B	3x16,8W.	3x2.422	144,2lm/W.	flood	3.000
5154 961 419B	3x16,8W.	3x2.526	150,4lm/W.	spot	4.000
5154 961 425B	3x16,8W.	3x2.526	150,4lm/W.	medium	4.000
5154 961 437B	3x16,8W.	3x2.526	150,4lm/W.	flood	4.000

code module W lm efficiency beam angle °K




colores_colors



materiales_materials

aluminio inyectado
y acero
die cast aluminium
and steel

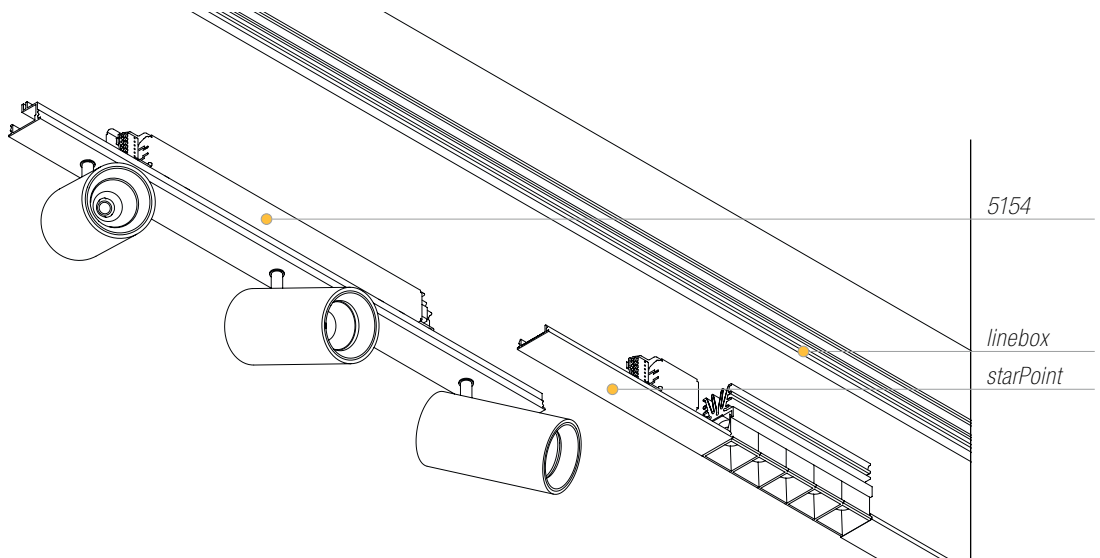

5154

linebox
starPoint

